




VCELINK CAT6 Ethernet Keystone Jack

CAT6/CAT5E | UTP | 90 Degree

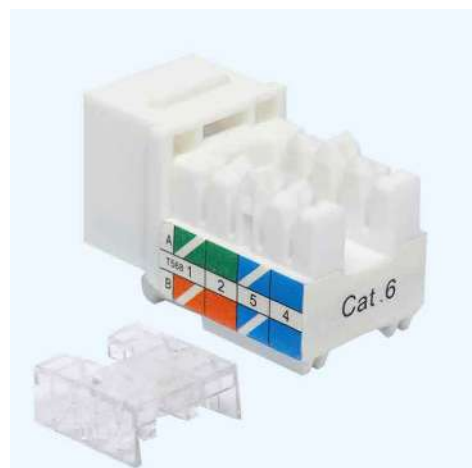

Material

Jack Housing	ABS+PC (White/Blue)
Jack Contact	Phosphor Bronze, Nickel Plated
IDC Housing	PC
IDC Terminal	Phosphor Bronze, Tin Plated
IDC Cap	PC Transparent Color
PCB	FR4, Thickness: 1.6mm

Performance:

Termination Specification	T568A&T568B
Insertion Force	20N Max
Retention Strength	7.7 KGS Between Jack and Plug
Operation Temperature	-10°C to 60 °C
Lifetime (Mating Cycles)	750 Cycles Min
Compatible Tool	Punch Down Tool

Usage:

Suitable for 23/24 AWG UTP Solid or Twist Wire

(Unit=mm)

