




VCELiNK CAT6 Pass Through RJ45 Connector

CAT6 | Unshielded

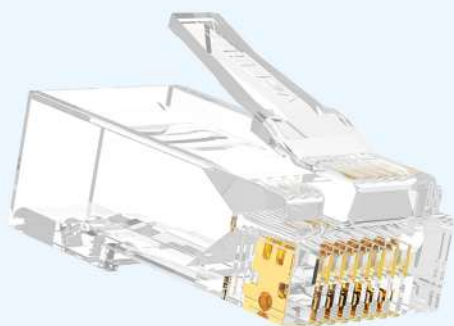

Electrical

UL Applications	250 VOLTS AC MAX. AT 2 AMPS
Dielectric Withstanding Voltage	1000 VOLTS AC. 60 SEC.
Insulation Resistance	500 MΩ
Contact Resistance	20mΩ MAX
Operating Ambient Temperature	-20°C~75°C

Material:

Housing	Polycarbonate, UL94V-0
Contact Blade	Copper Alloy
Gold Plating	50u"
Color	Transparent/Black/Blue

Mechanical

Strain Relife	20 Pound Min.
Durability	1200 Mating Cycles

Usage

AWG	Stranded&Solid Wire 23 AWG
Nomial Insulation Diameter	Wire OD From Ø 0.93 ~ Ø1.04

(Unit=mm)

